
3-Port PCIe Switch with Integrated Programmable I/O

Highlights

- PCIe Gen 4 (8GT/s) switch fabric
- Two 1-lane PCIe Gen 4 (8GT/s) expansion ports
- I/O Multiplexer (SMBus/SPI/UART/GPIO)

Target Applications

- Industrial PCs (PCIe 3.1 with 2 downstream ports)

Features

- Integrated PCI switching fabric
 - 512 byte maximum payload size
- Integrated PCIe physical interfaces
 - 2-lane (2x8GT/s) upstream port
 - Two 1-lane (1x8GT/s) downstream ports
 - Three external power supplies: +3.3V, +2.5V, +1.1V
- Comprehensive power management features
 - PCIe 3.1 LPSS (Low Power Sub States): L2 (with aux. power supply)
- Power and I/O
 - Integrated power-on reset circuit with configurable under/over voltage protection
 - Latch-up performance exceeds 150mA per EIA/JESD78, Class II
 - JEDEC Class 3A ESD performance
- UARTs
 - RS232/RS485
 - Auto-direction control
 - Standard and advanced speed support
 - Basic or comprehensive signal support
- Additional features
 - Multifunction GPIOs
 - Programmable pin multiplexer
 - Ability to use low-cost 25MHz crystal or clock for reduced BOM
 - SPI peripheral interface
 - SMBus target interface
 - SMBus controller interface
 - PVT Sensor
 - JTAG TAP
- Packaging
 - Pb-free RoHS compliant 72-pin VQFN package
- Environmental
 - Available in industrial grades, AEC-Q100 Grade 3, and AEC-Q100 Grade 2 temperature ranges

TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at docerrors@microchip.com. We welcome your feedback.

Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include -literature number) you are using.

Customer Notification System

Register on our web site at www.microchip.com to receive the most current information on all of our products.

1.0 INTRODUCTION

1.1 General Description

The Microchip PCI12000 is a single-chip 3-port PCIe switch with an integrated programmable I/O. The integrated PCIe physical interfaces provide a 2-lane (2x8GT/s) upstream port and two 1-lane (1x8GT/s) downstream ports. The device is targeted to address customer requests for higher bandwidth PCIe sub-systems within embedded applications. The maximum line rate is 8GT/s and it is certified against the GEN4 compliance program as defined in the PCIe Revision 4.x specifications. PCIe upstream can be delivered across a single or multiple lanes to accommodate best system architecture. The PCI12000 includes a compliant PCIe implementation from external facing physical interfaces through to switch fabric and endpoint controllers.

A programmable pin multiplexer is used to map I/O functions to package pins. This enables designers to work with either a default configuration or modify signals to best fit their application. Example signals include those associated with GPIO or SMBus, which are accessed via a dedicated PCIe Endpoint Controller.


Though many clocks are required for PCI12000 operation, these are generated within an integrated clock farm. Only a single-ended 25MHz clock or crystal is required externally together with a PCIe reference clock.

PCI12000 software presentation is enabled using standard abstractions to major operating systems.

The PCI12000 is available in a 72-pin VQFN package in industrial (-40°C to +85°C), automotive Grade 3 (-40°C to +85°C), or automotive Grade 2(-40°C to +105°C) temperature ranges.

An internal block diagram of the PCI12000 is shown in [Figure 1-1](#).

FIGURE 1-1: INTERNAL BLOCK DIAGRAM

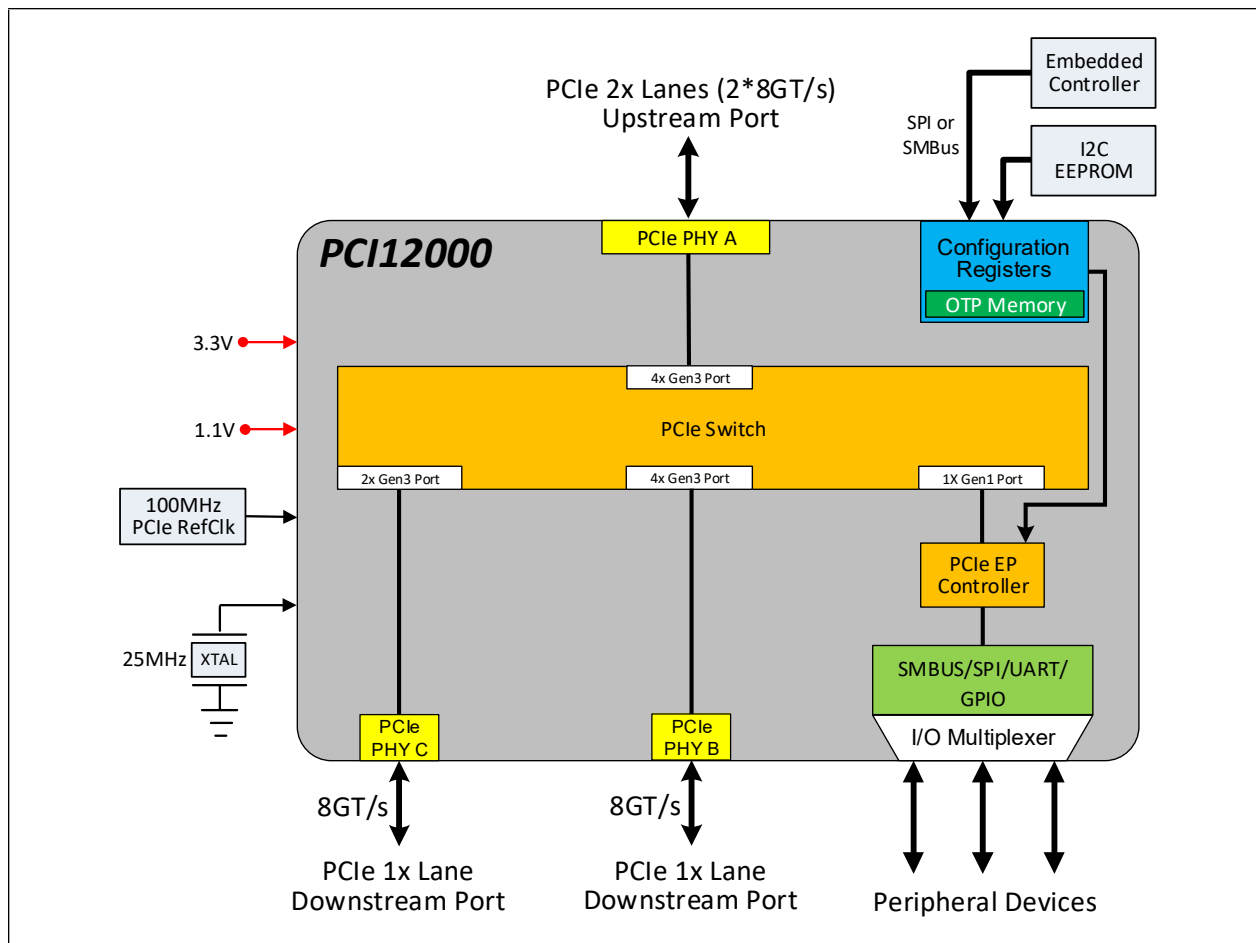

2.0 PACKAGE INFORMATION

FIGURE 2-1: 72-VQFN PACKAGE (DRAWING)

**72-Lead Very Thin Plastic Quad Flat, No Lead Package (ZUX) - 10x10x0.9 mm Body [VQFN]
With 7.9 mm Exposed Pad and Stepped Wettable Flanks**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>


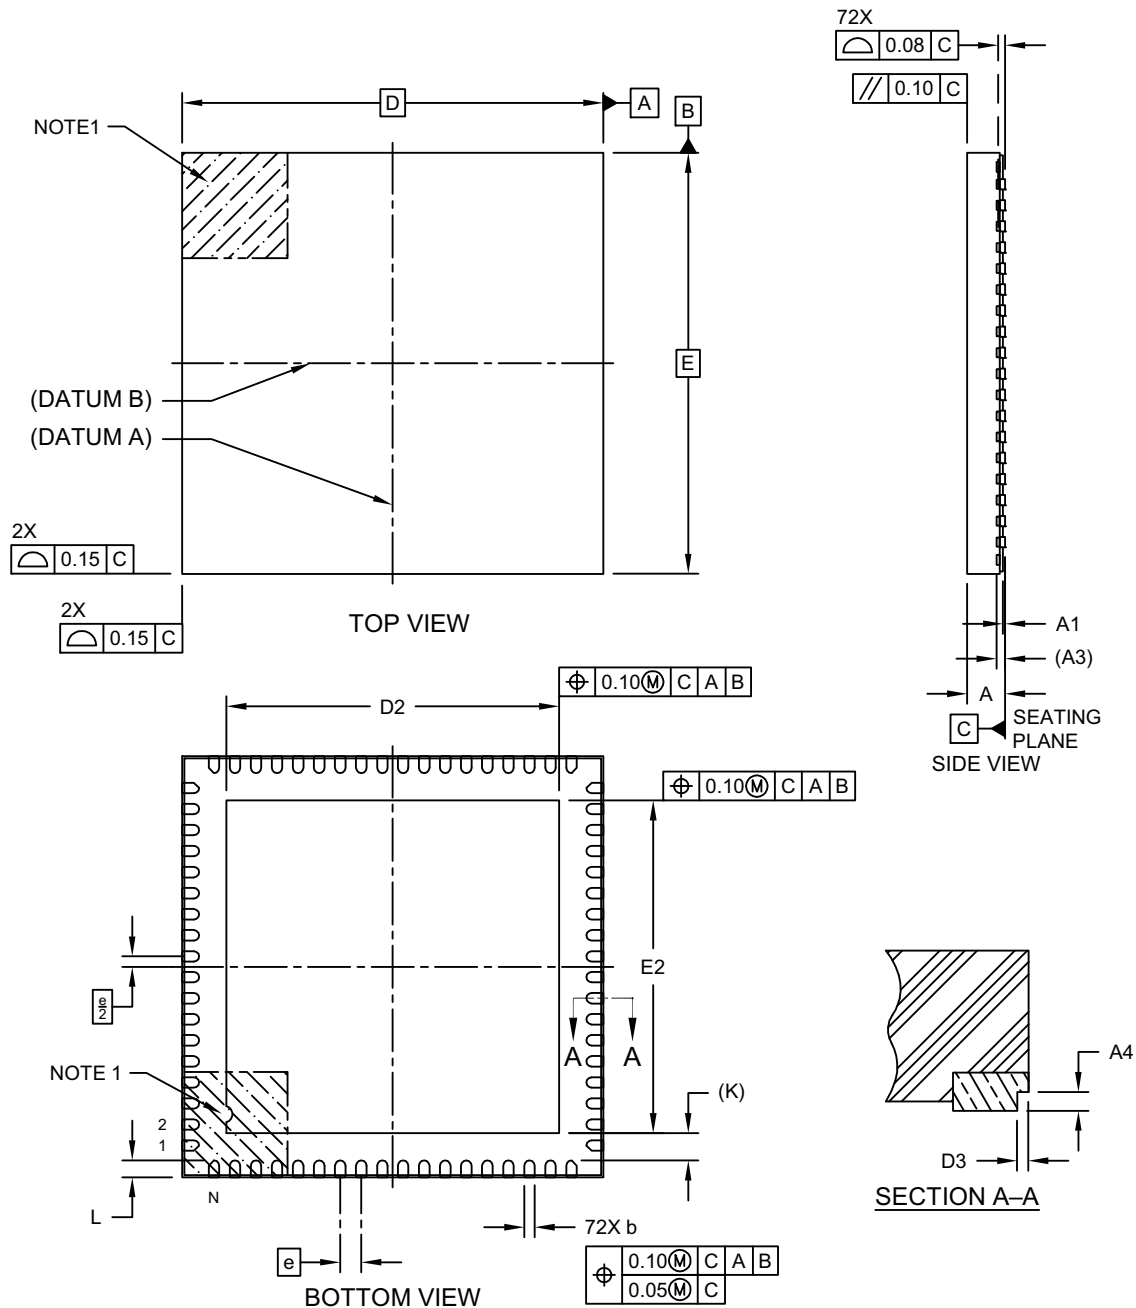


FIGURE 2-2: 72-VQFN PACKAGE (DIMENSIONS)

**72-Lead Very Thin Plastic Quad Flat, No Lead Package (ZUX) - 10x10x0.9 mm Body [VQFN]
With 7.9 mm Exposed Pad and Stepped Wettable Flanks**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

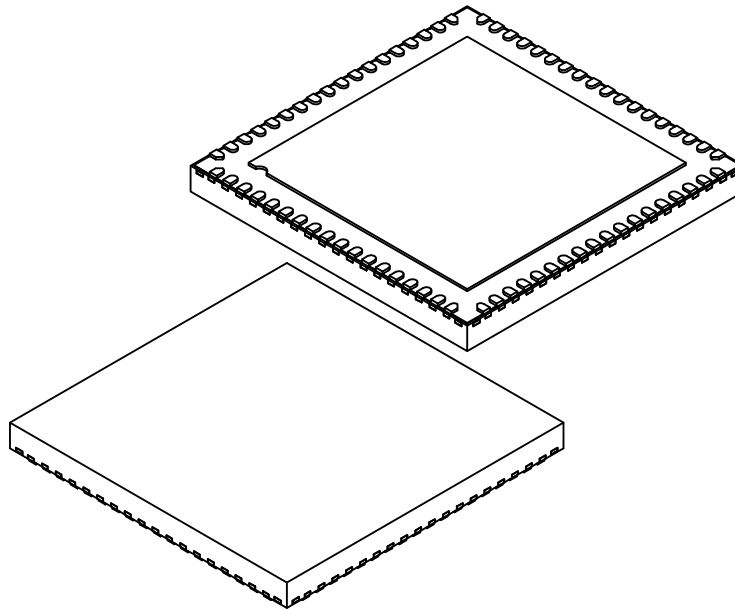

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	72		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	10.00 BSC		
Exposed Pad Length	D2	7.80	7.90	8.00
Overall Width	E	10.00 BSC		
Exposed Pad Width	E2	7.80	7.90	8.00
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K	0.65 REF		
Wettable Flank Step Cut Length	D3	–	–	0.085
Wettable Flank Step Cut Height	A4	0.10	–	0.19


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

FIGURE 2-3: 72-VQFN PACKAGE (LAND PATTERN)

**72-Lead Very Thin Plastic Quad Flat, No Lead Package (ZUX) - 10x10x0.9 mm Body [VQFN]
With 7.9 mm Exposed Pad and Stepped Wettable Flanks**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

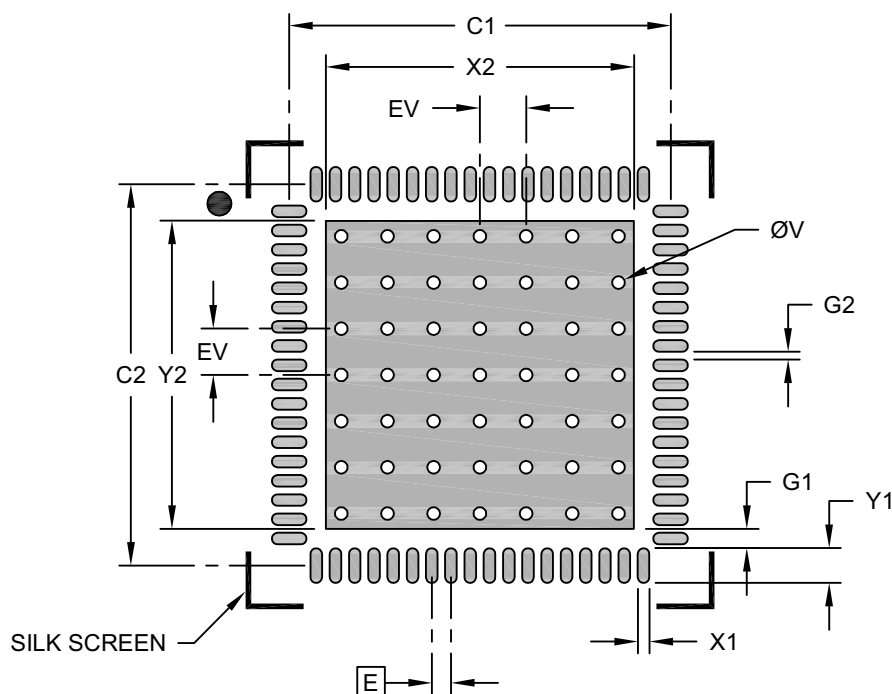

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			8.00
Center Pad Length	Y2			8.00
Contact Pad Spacing	C1		9.90	
Contact Pad Spacing	C2		9.90	
Contact Pad Width (Xnn)	X1			0.30
Contact Pad Length (Xnn)	Y1			0.90
Contact Pad to Center Pad (Xnn)	G1	0.50		
Contact Pad to Contact Pad (Xnn)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

APPENDIX A: PRODUCT BRIEF REVISION HISTORY

TABLE A-1: REVISION HISTORY

Revision Level & Date	Section/Figure/Entry	Correction
DS00003749C (10-27-25)	Throughout	Removed references to commercial temperatures
	Features	Updated cover bullets
	Throughout	Added industrial temperature ranges
DS00003794B (05-17-23)	Highlights	Updated cover bullets for clarity.
	Features	Removed the following items from Comprehensive Power Management features section: L1.off and L1.snooze.
	Section 1.1, General Description	Added the following sentence to the first paragraph: "The maximum line rate is 8GT/s and it is certified against the GEN4 compliance program as defined in the PCIe Revision 4.x specifications."
	Figure 1-1	Updated port names for clarity.
DS00003794A (01-08-21)	All	Initial Release.

PCI12000

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

<u>PART NO.</u>	<u>[X]⁽¹⁾</u>	-	<u>X</u>	/	<u>XXX</u>
Device	Tape and Reel Option		Temperature Range		Package
Device: PCI12000= 3-Port PCIe Switch with Prog.ammable I/O					
Tape and Reel Option: Blank = Standard packaging (tray) T = Tape and Reel (Note 1)					
Temperature Range: I = -40°C to +85°C (Industrial) V = -40°C to +105°C (Automotive Grade 2)					
Package: ZUX = 72-pin VQFN					

Examples:

a) PCI12000-I/ZUX
Tray, -40°C to +85°C (Industrial),
72-pin VQFN

b) PCI12000T-I/ZUX
Tape & reel, -40°C to +85°C (Industrial),
72-pin VQFN

c) PCI12000-I/ZUXVAO
Tray, -40°C to +85°C (Automotive Grade 3),
72-pin VQFN

d) PCI12000T-I/ZUXVAO
Tape & reel, -40°C to +85°C (Automotive Grade 3),
72-pin VQFN

e) PCI12000-V/ZUXVAO
Tray, -40°C to +105°C (Automotive Grade 2),
72-pin VQFN

f) PCI12000T-V/ZUXVAO
Tape & reel, -40°C to +105°C (Automotive Grade 2),
72-pin VQFN

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

THE MICROCHIP WEB SITE

Microchip provides online support via our WWW site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: <http://microchip.com/support>

Microchip Information

Trademarks

The “Microchip” name and logo, the “M” logo, and other names, logos, and brands are registered and unregistered trademarks of Microchip Technology Incorporated or its affiliates and/or subsidiaries in the United States and/or other countries (“Microchip Trademarks”). Information regarding Microchip Trademarks can be found at <https://www.microchip.com/en-us/about/legalinformation/microchip-trademarks>.

ISBN: 979-8-3371-2219-9

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.