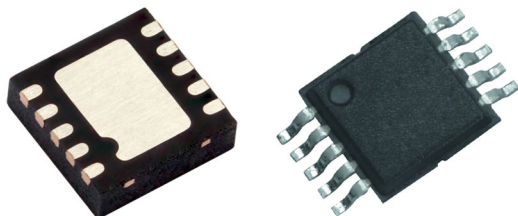


0.3 Ω , Low Voltage Dual SPDT Analog Switches



DESCRIPTION

The DG2535E and DG2733E are low voltage, low on-resistance, dual single-pole/double-throw (SPDT) monolithic CMOS analog switches designed for high performance switching of analog signals. Combining low-power, high speed, low on-resistance, and small package size, the DG2535E and DG2733E are ideal for portable and battery powered applications.

The DG2535E and DG2733E have an operation range from 1.65 V to 5.5 V single supply. The DG2535E has two separate control pins for independent control of the two SPDT switches. The DG2733E has an EN pin to enable the device when the logic is high.

The DG2535E and DG2733E have guaranteed 1.65 V logic compatible, allowing easy interface with low voltage DSP or MCU control logic.

The switches conduct signals within the power rails equally well in both directions when on, and blocks up to the power supply level when off. Break-before-make is guaranteed.

The DG2535E and DG2733E are built on Vishay Siliconix's sub micron CMOS low voltage process technology and provide greater than 400 mA latch-up protection, as tested per JESD78A.

The DG2535E and DG2733E are available in lead (Pb)-free 10-lead DFN and SOIC packages.

FEATURES

- 1.65 V to 5.5 V single power operation
- 0.3 Ω typ. switch on resistance at $V_+ = 5$ V
- Fast switching:
 $t_{ON} = 55$ ns at 2.7 V, $t_{OFF} = 15$ ns at 2.7 V
- Latch-up current > 400 mA (JESD78)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE

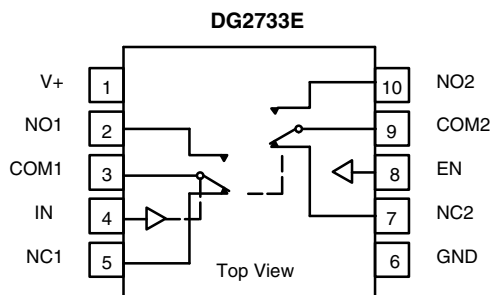
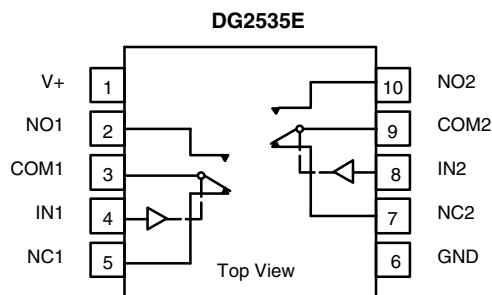
BENEFITS

- Low switch resistance
- Low voltage logic compatible
- Wide operation voltage range
- Fast switching time

APPLICATIONS

- Audio and video signal routing
- Battery operated systems
- Relay replacement
- Automatic test equipment
- Process control and automation
- Data acquisition systems
- Meters and instruments
- Medical and healthcare systems
- PCMCIA cards
- Communication systems

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



TRUTH TABLE DG2535E		
IN1, IN2	NC1, NC2	NO1, NO2
0	On	Off
1	Off	On

TRUTH TABLE DG2733E			
IN	EN	NC1, NC2	NO1, NO2
0	1	On	Off
1	1	Off	On
0	0	Off	Off
1	0	Off	Off

**ORDERING INFORMATION**

TEMPERATURE RANGE	PACKAGE	PART NUMBER
-40 °C to +85 °C	MSOP10	DG2535EDQ-T1-GE3
		DG2733EDQ-T1-GE3
	DFN-10	DG2535EDN-T1-GE4
		DG2733EDN-T1-GE4

ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ °C}$, unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNIT
Reference to GND	V+		-0.3 V to +6 V	V
	IN, COM, NC, NO ^a		-0.3 V to (V+ + 0.3)	
Current (any terminal except NO, NC or COM)			30	mA
Continuous current (NO, NC, or COM)			± 300	
Peak current (pulsed at 1 ms, 10 % duty cycle)			± 500	
Storage temperature (D suffix)			-65 to +150	°C
Power dissipation (packages) ^b	miniQFN10 ^c		208	mW
Latch up current		JESD78A	> 400	mA
ESD - HBM		ANSI / ESDA / JEDEC® JS-001	> 5000	V
ESD - CDM		JESD22-C101	> 1000	
ESD - MM		JESD22-A115	> 200	

Notes

- a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings
b. All leads welded or soldered to PC board
c. Derate 4 mW/°C above 70 °C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



SPECIFICATIONS							
PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V+ = 3 V, ± 10 %,V _{IN} = 0.4 V or 1.65 V ^e	TEMP. ^a	LIMITS -40 °C to +85 °C			UNIT
				MIN. ^b	TYP. ^c	MAX. ^b	
Analog Switch							
Analog signal range ^d	V _{analog}	R _{DS(on)}	Full	0	-	V+	V
On-resistance	R _{DS(on)}	V+ = 2.7 V, I _{NO/NC} = 100 mA, V _{COM} = 0.5 V	Room	-	0.5	0.7	Ω
		V+ = 2.7 V, I _{NO/NC} = 100 mA, V _{COM} = 1.5 V	Full	-	0.6	-	
		V+ = 2.7 V, I _{NO/NC} = 100 mA, V _{COM} = 0.5 V		Room	-	0.3	
		V+ = 2.7 V, I _{NO/NC} = 100 mA, V _{COM} = 1.5 V	Full		-	0.4	
		V+ = 5.5 V, I _{NO/NC} = 100 mA, V _{COM} = 0.9 V		Room	-	0.25	
		V+ = 5.5 V, I _{NO/NC} = 100 mA, V _{COM} = 2.5 V	Full		-	0.4	
		V+ = 5.5 V, I _{NO/NC} = 100 mA, V _{COM} = 0.9 V		Room	-	0.06	
		V+ = 5.5 V, I _{NO/NC} = 100 mA, V _{COM} = 2.5 V	Full		-	0.06	
R _{ON} match ^d	ΔR _{ON}	V+ = 2.7 V, I _{NO/NC} = 100 mA, V _{COM} = 0.5 V, 1.5 V		Room	-	0.06	0.08
		V+ = 5.5 V, I _{NO/NC} = 100 mA, V _{COM} = 0.9 V, 2.5 V					
R _{ON} resistance flatness ^d	R _{ON} flatness	V+ = 2.7 V, I _{NO/NC} = 100 mA, V _{COM} = 0.5 V, 1.5 V	Room	-	-	0.15	
Switch off leakage current (DG2535E)	I _{NO/NC(off)}	V+ = 5 V, V _{NO/NC} = 0.5 V / 4.5 V, V _{COM} = 4.5 V / 0.5 V	Room	-8	-	8	nA
	I _{COM(off)}		Full	-50	-	50	
			Room	-8	-	8	
			Full	-50	-	50	
Channel-on leakage current (DG2535E)	I _{COM(on)}	V+ = 5 V, V _{NO/NC} = V _{COM} = 4.5 V / 0.5 V	Room	-10	-	10	
			Full	-50	-	50	
Switch off leakage current (DG2733E)	I _{NO/NC(off)}	V+ = 5 V, V _{NO/NC} = 0.5 V / 4.5 V, V _{COM} = 4.5 V / 0.5 V	Room	-16	-	16	nA
	I _{COM(off)}		Full	-100	-	100	
			Room	-16	-	16	
			Full	-100	-	100	
Channel-on leakage current (DG2733E)	I _{COM(on)}	V+ = 5 V, V _{NO/NC} = V _{COM} = 4.5 V / 0.5 V	Room	-16	-	16	
			Full	-100	-	100	
Digital Control							
Input high voltage	V _{INH}	V+ = 3 V	Full	1.65	-	-	V
Input low voltage	V _{INL}		Full	-	-	0.4	
Input high voltage	V _{INH}	V+ = 5 V	Full	1.8	-	-	
Input low voltage	V _{INL}		Full	-	-	0.6	
Input capacitance	C _{IN}		Full	-	6	-	pF
Input current	I _{INL} or I _{INH}	V _{IN} = 0 or V+	Full	-1	-	1	μA
Dynamic Characteristics							
Break-before-make time ^e	t _{BBM}	V+ = 3.6 V, V _{NO} , V _{NC} = 1.5 V, R _L = 50 Ω, C _L = 35 pF	Room	1	15	-	ns
Turn-on time ^e	t _{ON}		Room	-	28	78	
			Full	-	-	80	
Turn-off time ^e	t _{OFF}		Room	-	13	58	
			Full	-	-	60	
Off-isolation ^d	OIRR	R _L = 50 Ω, C _L = 5 pF, f = 100 kHz	Room	-	-70	-	dB
Crosstalk ^d	X _{TALK}			-	-90	-	
3 dB bandwidth ^d		R _L = 50 Ω, C _L = 5 pF	Room	-	120	-	MHz
NO, NC off capacitance ^d	C _{NO(off)}	V _{IN} = 0 V, or V+, f = 1 MHz	Room	-	40	-	pF
	C _{NC(off)}			-	40	-	
Channel on capacitance ^d	C _{NO(on)}			-	120	-	
	C _{NC(on)}			-	120	-	
Power Supply							
Power supply range	V+		-	1.65	-	5.5	V
Power supply current	I+	V _{IN} = 0 or V+	Full	-	-	1	μA

Notes

a. Room = 25 °C, full = as determined by the operating suffix

b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this datasheet

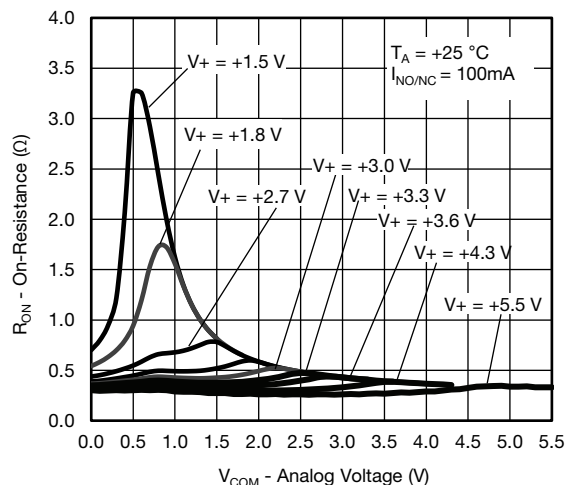
c. Typical values are for design aid only, not guaranteed nor subject to production testing

d. Guarantee by design, not subjected to production test


e. V_{IN} = input voltage to perform proper function




TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise noted)




R_{ON} vs. V_{COM} and Supply Voltage

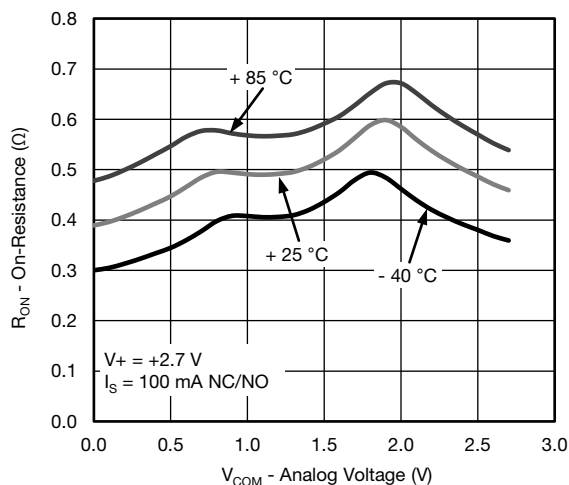

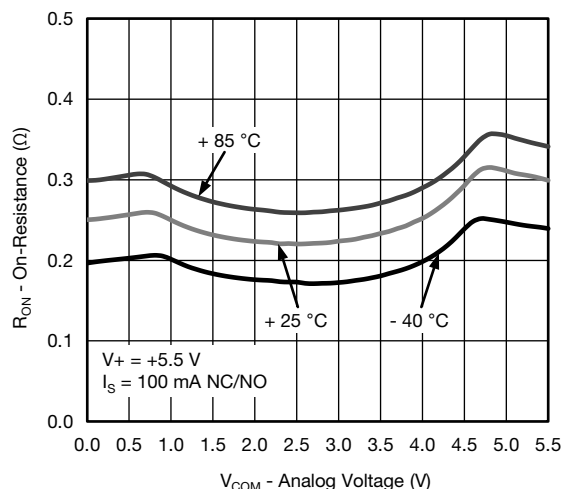R_{ON} vs. Analog Voltage and Temperature



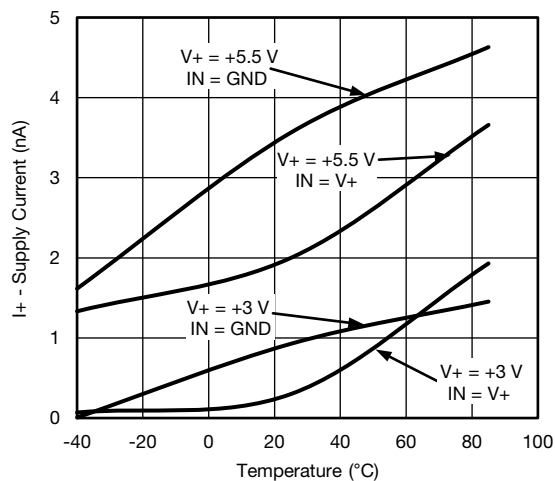
R_{ON} vs. Analog Voltage and Temperature




Supply Current vs. Temperature



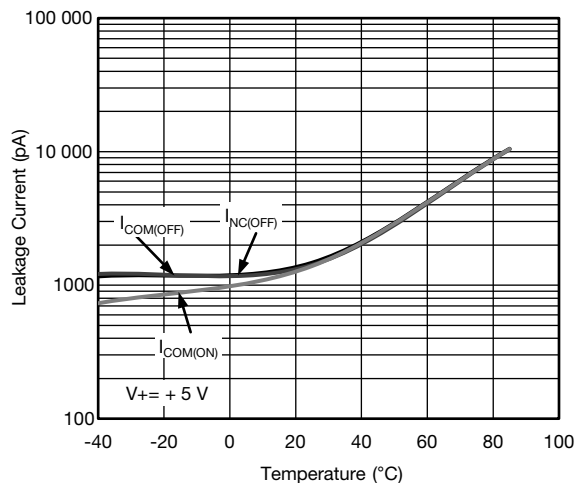
TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise noted)




Leakage Current vs. Temperature

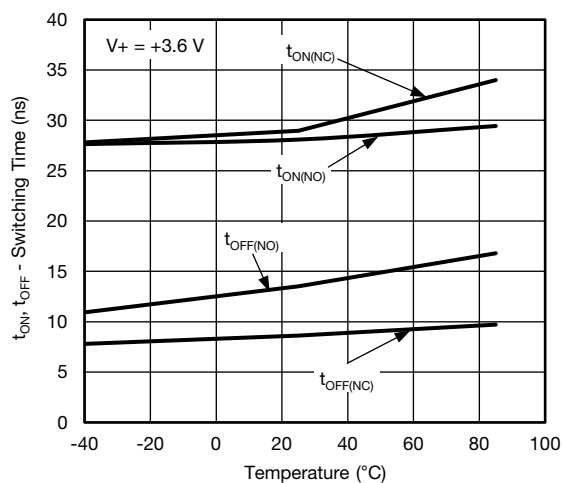


Switching Time vs. Temperature

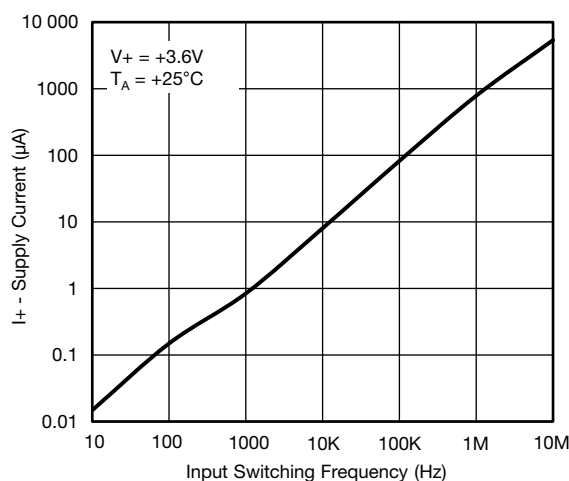


Supply Current vs. Switching Frequency

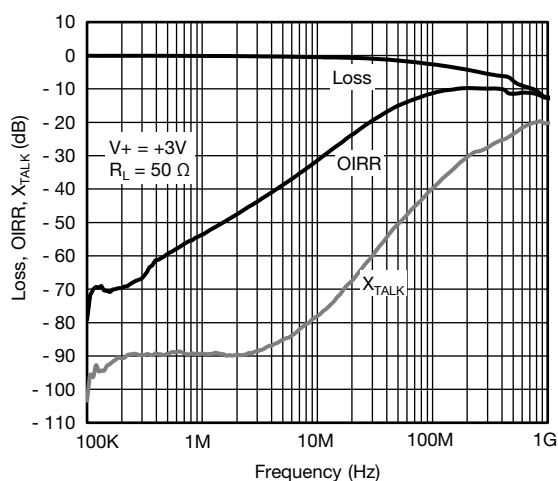

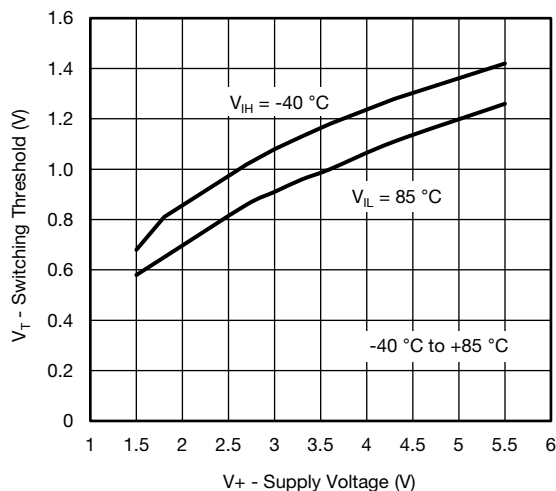
Insertion Loss, Off-Isolation Crosstalk vs. Frequency




Switching Threshold vs. Supply Voltage

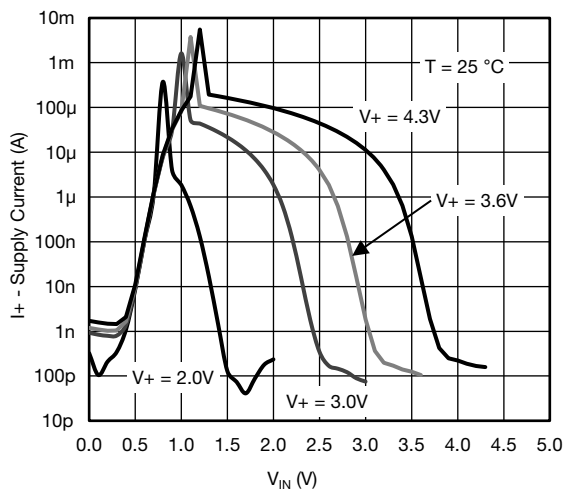





Supply Current vs. V_{IN}

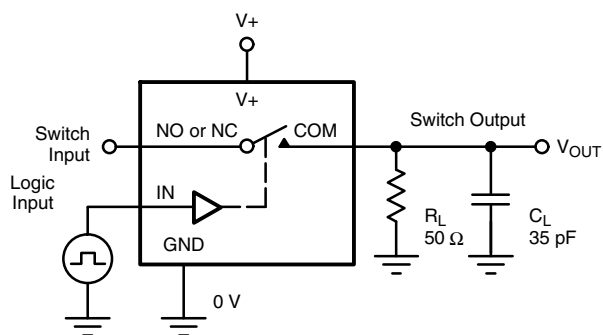TEST CIRCUITS

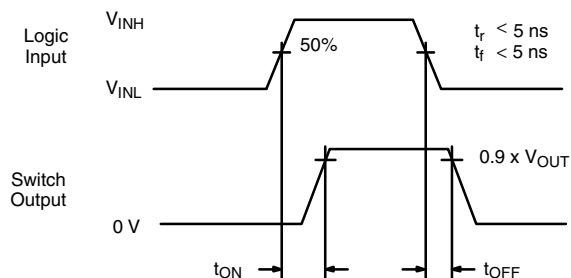 C_L (includes fixture and stray capacitance)
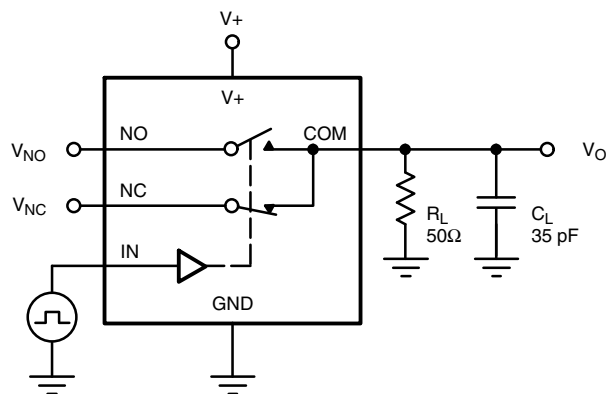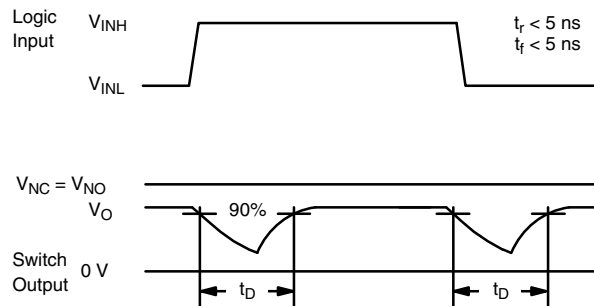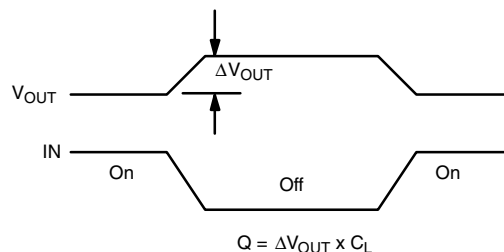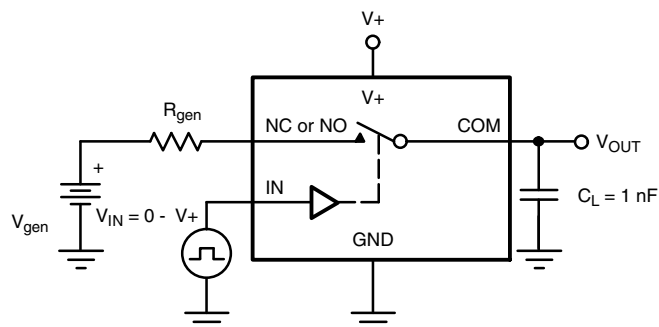
$$V_{OUT} = V_{COM} \left(\frac{R_L}{R_L + R_{ON}} \right)$$





Logic "1" = Switch On
Logic input waveforms inverted for switches that have the opposite logic sense.

Fig. 1 - Switching Time

 C_L (includes fixture and stray capacitance)

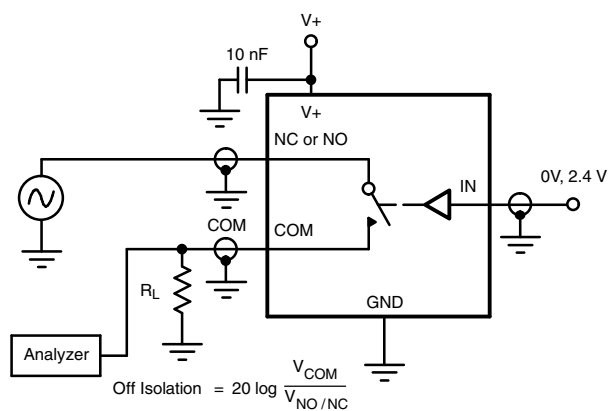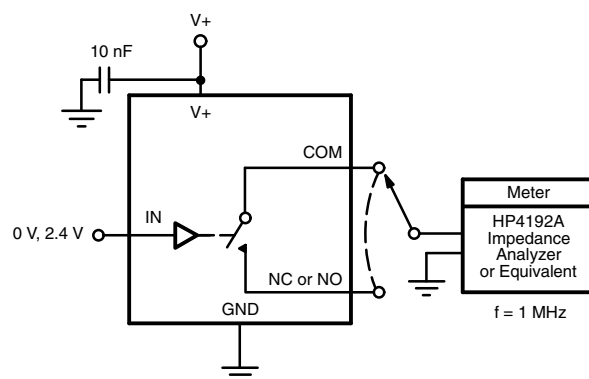Fig. 2 - Break-Before-Make Interval


IN depends on switch configuration: input polarity determined by sense of switch.

Fig. 3 - Charge Injection

TEST CIRCUITS

Fig. 4 - Off-Isolation

Fig. 5 - Channel Off/On Capacitance






PRODUCT SUMMARY				
Part number	DG2535E	DG2535E	DG2733E	DG2733E
Status code	2	2	2	2
Configuration	SPDT x 2	SPDT x 2	DPDT x 2	DPDT x 3
Single supply min. (V)	1.65	1.65	1.65	1.65
Single supply max. (V)	5.5	5.5	5.5	5.5
Dual supply min. (V)	-	-	-	-
Dual supply max. (V)	-	-	-	-
On-resistance (Ω)	0.25	0.25	0.25	0.25
Charge injection (pC)	-	-	-	-
Source on capacitance (pF)	120	120	120	120
Source off capacitance (pF)	40	40	40	40
Leakage switch on typ. (nA)	-	-	-	-
Leakage switch off max. (nA)	8	8	8	8
-3 dB bandwidth (MHz)	120	120	120	120
Package	MSOP-10	DFN-10	DFN-10	MSOP-10
Functional circuit / applications	Multi purpose, instrumentation, medical and healthcare, portable	Multi purpose, instrumentation, medical and healthcare, portable	Multi purpose, instrumentation, medical and healthcare, portable	Multi purpose, instrumentation, medical and healthcare, portable
Interface	Binary	Binary	Binary	Binary
Single supply operation	Yes	Yes	Yes	Yes
Dual supply operation	-	-	-	-
Turn on time max. (ns)	78	78	78	78
Crosstalk and off isolation (dB)	90	90	90	90

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?75646.



MSOP: 10-LEADS

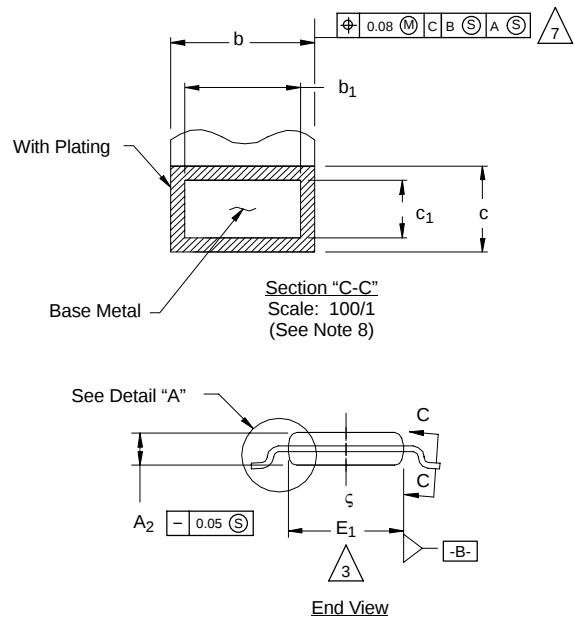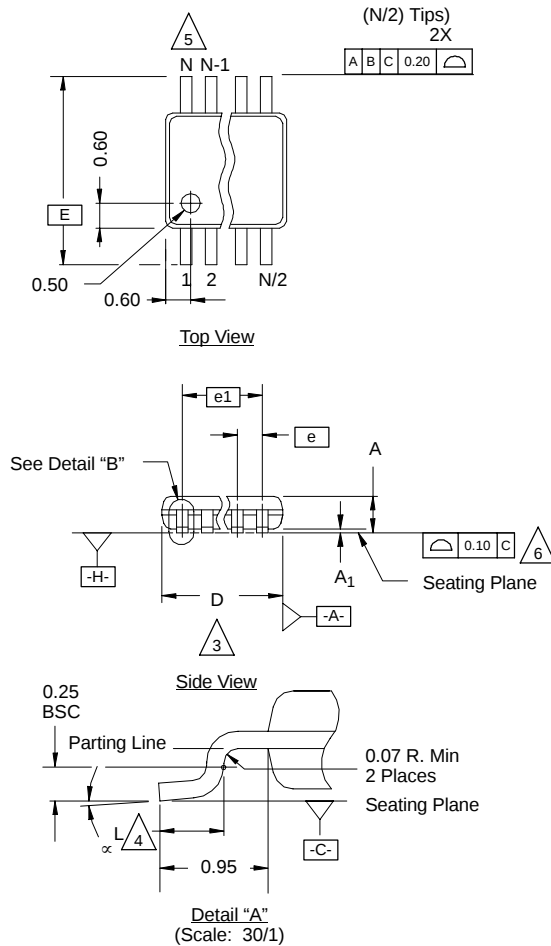JEDEC Part Number: MO-187, (Variation AA and BA)



NOTES:

- Die thickness allowable is 0.203 ± 0.0127 .
- Dimensioning and tolerances per ANSI.Y14.5M-1994.
- Dimensions "D" and "E₁" do not include mold flash or protrusions, and are measured at Datum plane $\square\text{H}$, mold flash or protrusions shall not exceed 0.15 mm per side.
- Dimension is the length of terminal for soldering to a substrate.
- Terminal positions are shown for reference only.
- Formed leads shall be planar with respect to one another within 0.10 mm at seating plane.
- The lead width dimension does not include Dambar protrusion. Allowable Dambar protrusion shall be 0.08 mm total in excess of the lead width dimension at maximum material condition. Dambar cannot be located on the lower radius or the lead foot. Minimum space between protrusions and an adjacent lead to be 0.14 mm. See detail "B" and Section "C-C".
- Section "C-C" to be determined at 0.10 mm to 0.25 mm from the lead tip.
- Controlling dimension: millimeters.
- This part is compliant with JEDEC registration MO-187, variation AA and BA.
- Datums $\square\text{A}$ and $\square\text{B}$ to be determined Datum plane $\square\text{H}$.
- Exposed pad area in bottom side is the same as the leadframe pad size.


N = 10L

Dim	MILLIMETERS			Note
	Min	Nom	Max	
A	-	-	1.10	
A ₁	0.05	0.10	0.15	
A ₂	0.75	0.85	0.95	
b	0.17	-	0.27	8
b ₁	0.17	0.20	0.23	8
c	0.13	-	0.23	
c ₁	0.13	0.15	0.18	
D	3.00 BSC			3
E	4.90 BSC			
E ₁	2.90	3.00	3.10	3
e	0.50 BSC			
e ₁	2.00 BSC			
L	0.40	0.55	0.70	4
N	10			5
α	0°	4°	6°	

ECN: T-02080—Rev. C, 15-Jul-02
DWG: 5867



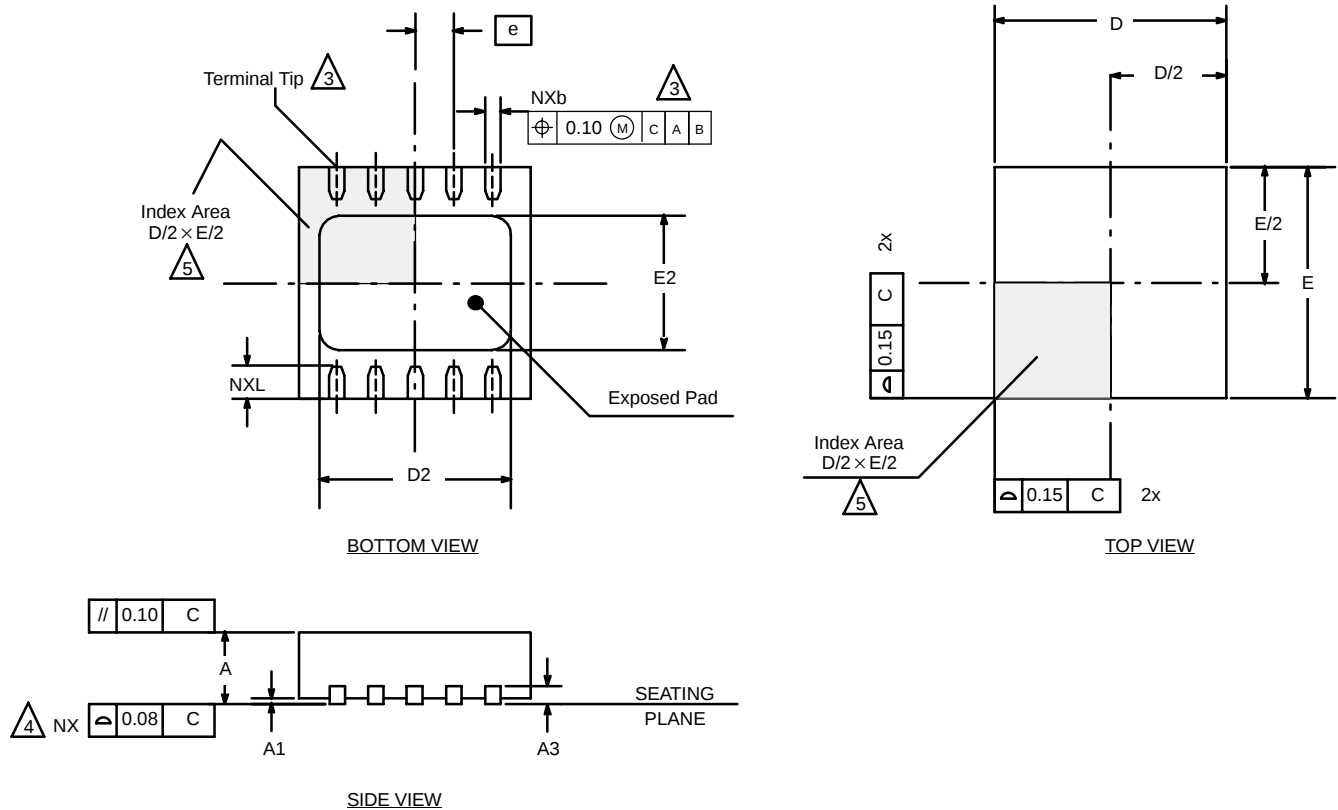DFN-10 LEAD (3 X 3)



NOTES:

1. All dimensions are in millimeters and inches.

2. N is the total number of terminals.

3. Dimension b applies to metallized terminal and is measured between 0.15 and 0.30 mm from terminal tip.

4. Coplanarity applies to the exposed heat sink slug as well as the terminal.

5. The pin #1 identifier may be either a mold or marked feature, it must be located within the zone indicated.

Dim	MILLIMETERS			INCHES		
	Min	Nom	Max	Min	Nom	Max
A	0.80	0.90	1.00	0.031	0.035	0.039
A1	0.00	0.02	0.05	0.000	0.001	0.002
A3	0.20 BSC			0.008 BSC		
b	0.18	0.23	0.30	0.007	0.009	0.012
D	3.00 BSC			0.118 BSC		
D2	2.20	2.38	2.48	0.087	0.094	0.098
E	3.00 BSC			0.118 BSC		
E2	1.49	1.64	1.74	0.059	0.065	0.069
e	0.50 BSC			0.020 BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020
*Use millimeters as the primary measurement.						
ECN: S-42134—Rev. A, 29-Nov-04						
DWG: 5943						



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.